



Motorised length stops on roller conveyor

Ref: TYRObut



STANDARD EQUIPMENT

- Easy to install on all machines: drilling, tapping & cut-off machines
- Installation: right or left side of the machine
- Display and input on 7" colour touch screen (in French)
- Setting by entering the measure or by selecting from 12 memories (expandable to 99)
- Resolution : 0,1 mm
- Precision : 0,5 mm
- Movement speed: 400 mm/s
- Automatic locking in position
- Configurable automatic withdrawal
- Trolley guided by precision rollers
- Driven by a toothed belt reinforced with steel wires
- Width: 200, 300 or 400 mm
- Rollers: Ø40mm made in steel or PVC (*specify at order*). Three rollers with 200 mm pitch, the others at 400 mm pitch
- Load: 40 Kg/m
- Adjustable height: 740 to 1000 mm
- Available lengths: 3000, 3500 or 4000 mm



Screen of TYRObut



- 1 – Visual movement
- 2 – Memory N°
- 3 – Memories scrolling
- 4 – Memorised measure
- 5 – Actual position
- 6 – Withdrawal key
- 7 – Step by step movement value
- 8 – Step by step movement & direction

Length	Width: 200mm Rollers: Ø40mm Steel or PVC	Width: 300mm Rollers: Ø40mm Steel or PVC	Width: 400mm Rollers: Ø40mm Steel or PVC
3000mm	YES	X	YES
3500mm	X	YES	X
4000mm	YES	X	YES
Machine accessories :			
Front foot for independent mounting	YES	YES	YES
Cable emergency stop	YES	YES	YES



Motorised length stops on roller conveyor

Ref: TYRObut CR - CRT

EQUIPEMENT STANDARD

- Easy to install on all machines: drilling, tapping & cut-off machines
- Installation: right or left side of the machine
- Display and input on 7" colour touch screen (in French)
- Setting by entering the measure or by selecting from 12 memories (expandable to 99)
- Resolution : 0,1 mm
- Precision : 1/10 mm on high precision rack
- Movement speed: 400 mm/s (*configurable*)
- Automatic locking in position
- Configurable automatic withdrawal
- Width: 200, 400 or 600 mm (300mm for CRT model)
- Rollers: Ø40mm made in steel or PVC (*specify at order*). Three rollers with 200 mm pitch, the others at 400 mm pitch
- Protective metal sheet between rollers
- Load: 60 Kg/m
- Adjustable height: 740 to 1000 mm
- Available lengths: 3000 to 7000 mm




TYRObut-CR



TYRObut-CRT

Screen of TYRObut

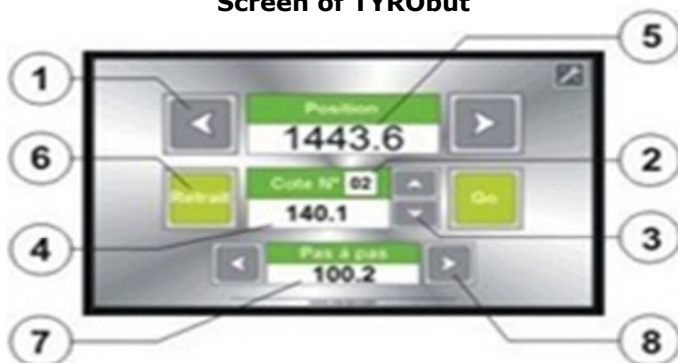

- 1 - Visual movement
- 2 - Memory N°
- 3 - Memories scrolling
- 4 - Memorised measure
- 5 - Actual position
- 6 - Withdrawal key
- 7 - Step by step movement value
- 8 - Step by step movement & direction



Motorised length stops on roller conveyor

Ref: TYRObut CR - CRT

Lengths	Width: 200mm Rollers: Ø40mm Steel or PVC	Width: 300mm Rollers: Ø40mm Steel or PVC	Width: 400mm Rollers: Ø40mm Steel or PVC	Width: 600mm Rollers: Ø40mm Steel or PVC
3000mm	YES		YES	YES
3500mm		YES		
4000mm	YES		YES	YES
6000mm	YES		YES	YES
6500mm		YES		
7000mm	YES		YES	YES
Machine accessories:				
Front foot for independent mounting	YES	YES	YES	YES
Cable emergency stop	YES	YES	YES	YES
Remote console	YES	YES	YES	YES



Remote console