



Horizontal roller conveyor light weight

Ref: TRT


STANDARD EQUIPMENT

- Conveyor made of a module of 2 or 3 meters long, connectable to each other (via its foot).
- Steel rollers Ø 40 or Ø 70 mm
- Roller pitch : 333 mm
- TR-T-60 : Width : 200, 300 or 400 mm
Roller Ø 40 mm - Load : 60 kg/m
- TR-T-150 : Width : 300, 400 or 500 mm
Roller Ø 70 mm - Load : 150 kg/m
- Adjustable height : 740 to 1100 mm
- This conveyor can be adapted at the front or the rear of a circular saw or any other equipment installed in your factory.



OPTIONAL EQUIPMENT

- Measuring stop with ruler or LCD : our model GUIDAL
- Centering device for holes
- Rear guide, height : 70 mm
- PVC rollers Ø 40 mm

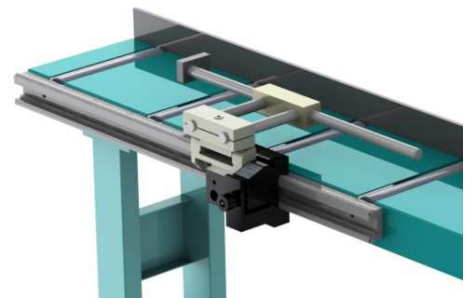

Models TRT	Width : 200 mm Steel roller : Ø 40 mm Load : 60 kg/m	Width : 300 mm Steel roller : Ø 40 mm Load : 60 kg/m	Width : 400 mm Steel roller : Ø 40 mm Load : 60 kg/m
2000 mm	YES	YES	YES
3000 mm	YES	YES	YES

Modèles TRT	Width : 200 mm Steel roller : Ø 70 mm Load : 150 kg/m	Width : 300 mm Steel roller : Ø 70 mm Load : 150 kg/m	Width : 400 mm Steel roller : Ø 70 mm Load : 150 kg/m
2000 mm	YES	YES	YES
3000 mm	YES	YES	YES

ROTY & Fils – 64 rue de la Ville-Es-Cours – Z.I. Sud – 35400 SAINT-MALO – FRANCE

Tel : +33 (0)2 99 58 40 47

E-mail : contact@roty-tyro.com

www.roty-tyro.com